




9645 Airport Hwy,  
Monclova, OH 43542  
419-861-9600

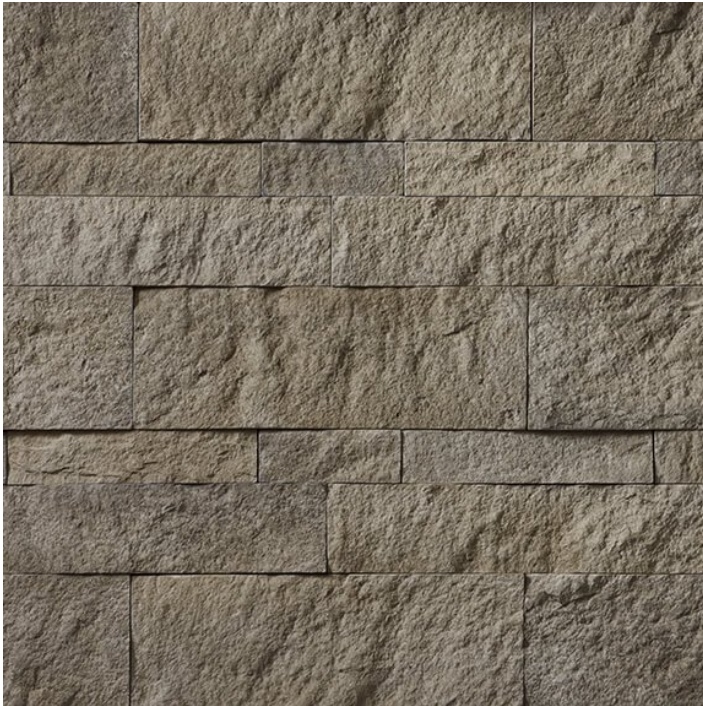

## HEWNSTONE 3" TALUS 10 LINEAR FOOT HANDIPACK

Brings the chic solemnity of castle-work to modern architecture with rough textures and smooth colors. Inspirational patterns and five unique sizes offer ultimate customization in design. Available Dimensions (approx): 3" H x 8" L, 3" H x 14" L, 5" H x 14" L, 5" H x 22" L and 8" H x 22" L

**SKU** 16857

**Brand** CULTURED STONE

**Application/Use** Veneer

### Size

**Dimension** Corner Returns 3", 7"

**Thickness** 1 1/2"

**Height** 3"

### Characteristics

**Color** Light Gray|Desert Sand

**Cut** Hewn Stone

**Veneer Type** Thin Veneer

**Material** Concrete

### Data

**ASTM TESTING DATA** Materials cement Astm C 150 or Aci 318 Section 3.2.1 sand Astm C 144 or C 33 aggregate Astm C 33 or C 330 (except Gradation), C 331 testing shear Bond Test (adhesion) tested in Accordance With Astm C 482 > 50 Psi water Absorption Tested in Accordance With Ubc 15-5 9%-22% Depending on Texture freeze/thaw Characteristics testing Procedures Follow Those Outlined in Astm C 67 < 3% Mass Loss compressive Strength tested in Accordance With Astm C 39 > 1800 Psi @ 28 Days unit Weight density Is Determined in Accordance With Astm C 567 < 15 Lbs. Per Square Foot tensile Strength Tested in Accordance With Astm C 190 Reported flexural Strength Tested in Accordance With Astm C 348 Reported thermal Properties tested in Accordance With Astm C 177-71 r-value Is .620 Based on a 1.75" Thick Sample. Average Thickness May Vary on Different Cultured Stone Veneer Products, and the R-value Will Vary Accordingly. noncombustible tested and Listed by Underwriters Laboratories, Inc. cultured Stone Brand Products Showed Zero

Flame Spread and Zero Smoke Development.

---

Coverage & Weight

Coverage per Box 10 LIN FT

---